

BAE SECURA OPzV-N7 BLOCK

Technical Specification for Stationary VRLA – Raised Post Block Batteries

1. Application

The BAE OPzV Series VRLA tubular plate gel batteries belong to the best EUROBAT classification for maintenance free lead-acid batteries. These are classified as >12 years, long life, the highest classification according to EUROBAT. They are ideally suited for stand-by operations with high requirement of operational safety. They perfectly meet requirements for bridging times between 1h to more than 10h. The raised post “N7” design permits individual internal and connection Ohmic testing on a per cell basis for a significant increase in reliability.

In applications with high requirements of operational safety and bridging times of 1h to more than 10h, the BAE OPzV is the right choice.

Application Uses:

Telecommunications
Microwave radio systems
Emergency lighting
Power generation plants
Electrical utilities applications
Outdoor enclosures
Photovoltaic applications



UL file no. MH64832


2. Types, capacities, dimensions, mass

Type	1 min 25°C	C ₁ 25°C	C ₄ 25°C	C ₈ 25°C	C ₁₂ 25°C	R _i 1)	I _k 2)	Length (L)	Width (W)	Height (H)	Weight filled	Lead mass
U _e V/cell	Amps 1.75	Ah 1.75	Ah 1.75	Ah 1.75	Ah 1.75	mΩ	kA	inch	inch	inch	lbs	lbs
12V 1 OPzV 50-N7	109	35	51	60	64	21.60	0.58	10.71	8.07	15.16	89.4	59.1
12V 2 OPzV 100-N7	197	68	96	108	116	10.80	1.15	10.71	8.07	15.16	109.8	80.9
12V 3 OPzV 150-N7	275	101	142	164	175	7.20	1.73	14.96	8.07	15.16	166.4	117.2
6V 3 OPzV 150-N7	275	101	142	164	175	3.47	1.85	10.71	8.07	15.16	96.5	57.9
6V 4 OPzV 200-N7	344	133	192	212	235	2.70	2.30	10.71	8.07	15.16	112.4	77.2
6V 5 OPzV 250-N7	404	167	241	281	295	2.16	2.88	14.96	8.07	15.16	145.6	95.3
6V 6 OPzV 300-N7	462	201	288	336	354	1.80	3.45	14.96	8.07	15.16	161.6	113.9


1) Internal resistance from IEC 60896-11; 2) Short circuit current from IEC 60896-11; All data is subject to change.

Height (H) is the maximum distance between container bottom and top of the bolts in assembled condition.

3. Terminal positions

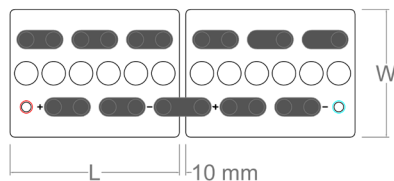

12V 1 OPzV 50-N7 to 12V 3 OPzV 150-N7

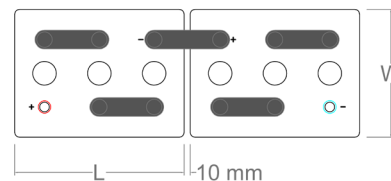

6V 3 OPzV 150-N7 to 6V 6 OPzV 300-N7

Technical Specification for BAE *SECURA OPzV-N7 BLOCK*

4. Design

Positive electrode	Tubular plate with a polyester gauntlet and solid grids in a corrosion-resistant PbCaSn alloy
Negative electrode	Round-grid flat plate in a PbCaSn alloy with long-life expander material
Separation	Micro-porous separator
Electrolyte	Sulphuric acid with a density of 1.24 kg/l, fixed as a GEL by fumed silica
Container and lid	High impact ABS (Acrylonitrile-Butadiene-Styrene), UL 94 HB rating, light grey color Optional: Container and Lid in ABS, UL 94 V-0 rating, dark grey color
Blocks with blind cells	4V, 8V, and 10V
Valve	Valve with flame arrestor, opening pressure approx. 120 mbar, closing pressure approx. 50 mbar
Pole - bushing	100% gas and electrolyte tight, sliding, injection moulded "Panzerpol"
Kind of pole	M10 brass insertion
Inter-cell connectors	Insulated solid copper connectors with cross-sections of 90, 150 or 300 mm ² depending upon application
Inter-tier connectors	Flexible insulated copper cables
Connector screw	M10 stainless steel with insulated cap
Kind of protection	IP 25 regarding DIN 40050, touch protected according VBG 4

5. Charging

IU - characteristic	Recommended: $I_{\max} = 2 \times I_{10}$ $U = 2.25 \text{ V/cell} \pm 1\%$, between 10°C and 45°C (50°F to 113°F) $\Delta U/\Delta T = -0,003 \text{ V/K}$ below 10°C in the monthly average
float current	20 to 30 mA/100 Ah
boost charge	$U = 2.33 \text{ to } 2.40 \text{ V/cell}$, time limited
charging time up to 92%	6h with $1.5 \times I_{10}$ initial current, 2.25 V/cell, 50% C10 discharged

6. Discharge characteristics

reference temperature	25°C (77°F)
initial capacity	95% or better at time of delivery
depth of discharge (DOD)	Normally up to 80%
deep discharges	More than 80% DOD or discharges beyond final discharge voltages (dependent on discharge current) have to be avoided

7. Maintenance

every 6 months	Check and record battery voltage, pilot cell voltages and temperatures
every 12 months	Check and record battery voltage, cell voltages and temperatures

8. Operational data

Classification - EUROBAT	> 12 years, Long life
Operational life	15 to 20 years in standby operation, float at 20°C to 25°C (68°F to 77°F)
Maintenance-free	No topping off water during life
IEC 60 896-2 cycles	>1200
Self-discharge	Approx. 2% per month at 20°C (68°F)
Operational temperature	-20°C to 45°C (-4°F to 113°F), recommended 10°C to 30°C (50°F to 86°F), short periods at 45°C to 55°C (113°F to 131°F)
Standard	DIN 40742 part 1
Tests according to	IEC 60896-21, -22
Safety standard, ventilation	DIN EN 50272-2, Ventilation requirements are reduced to 20% compared to those for vented batteries of the same capacity
Transport	Subject to DOT Regulations – See SDS for details
UL Safety Recognition	UL 1989 Recognized, UL File No. MH64832

BAE Batteries USA • 484 County Road V V • Somerset WI 54025

TEL (715) 247-2262 FAX (715) 247-5741

www.baebatteriesusa.com

